


TDyn Trittschall-Reduzierungs-Wert

ThermoDyn®
Innovation in Baustoffe

ThermoDyn +10 Spachtel (mm):	Tritt-Schall-Reduzierung (dB):
150	34
140	32
130	30
120	29
110	27
100	26
90	25
80	24
70	23
60	22
50	21
40	20
30	18
20	17
15	16
10	16

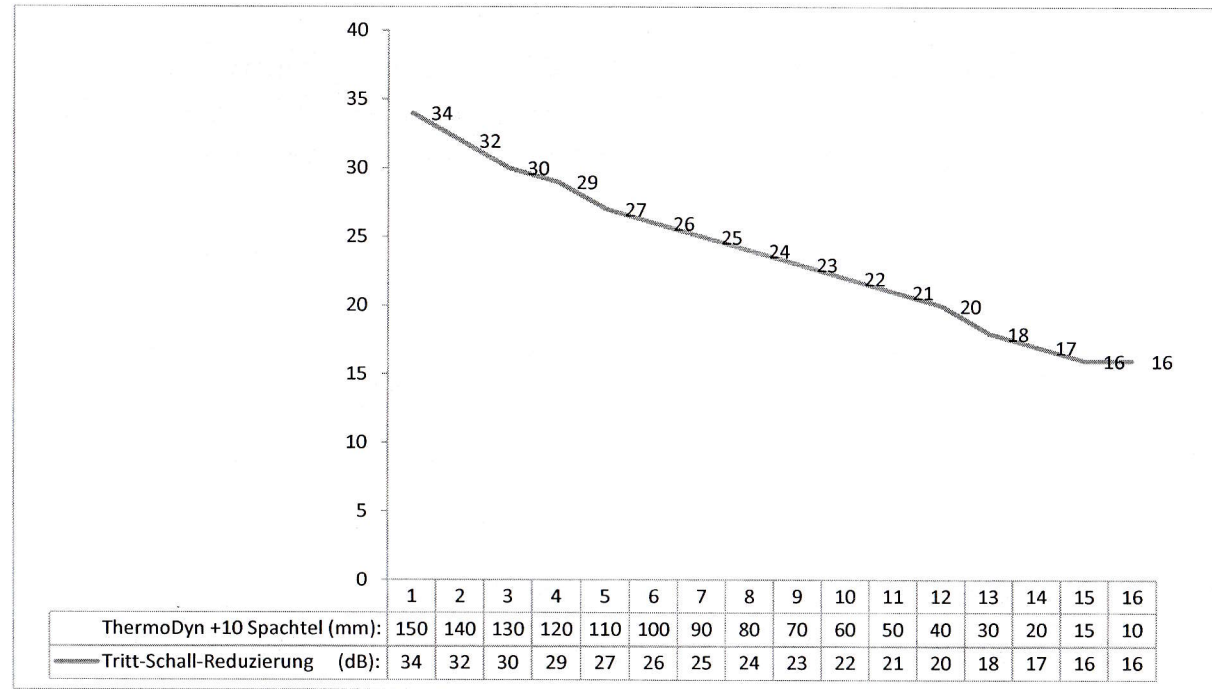

Dipl.-Ing. J. Lange, M.BP.
Hochschule Ostwestfalen-Lippe
University of Applied Sciences

ThermoDyn®
Innovation in Baustoffe

ThermoDyn Produktion & Handel Kern
Robmoos 20
D-87629 Füssen-Weißensee
Tel.: +49-7006/1554433
Fax: +49-8363/94189
www.thermodyn.de · info@thermodyn.de
LSC-IdNr.: DE263002704